



Paired feeds target the unwanted field component along the flow

All: 8 mm mean winding diameter; 1.5 mm wire / 2.5 mm pitch. Coil center retained. Blue arrow: assumed flow.


Single feed / 2 turns

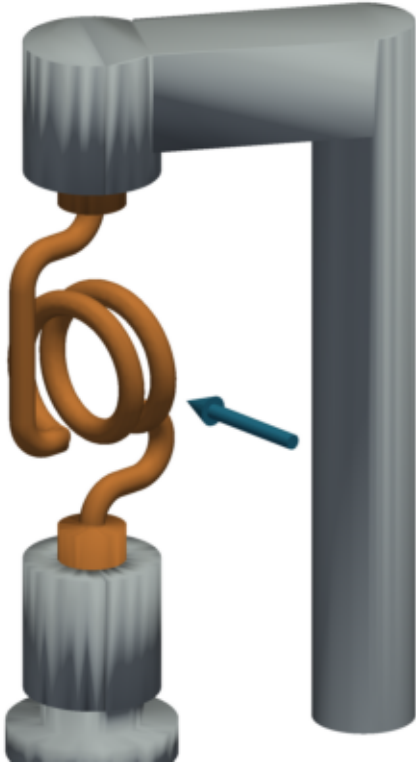

Paired feed / 2 turns

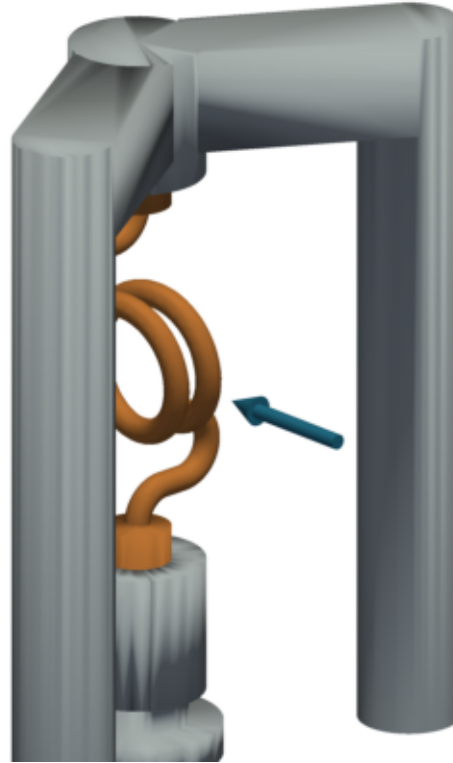

Paired feed / 3 turns

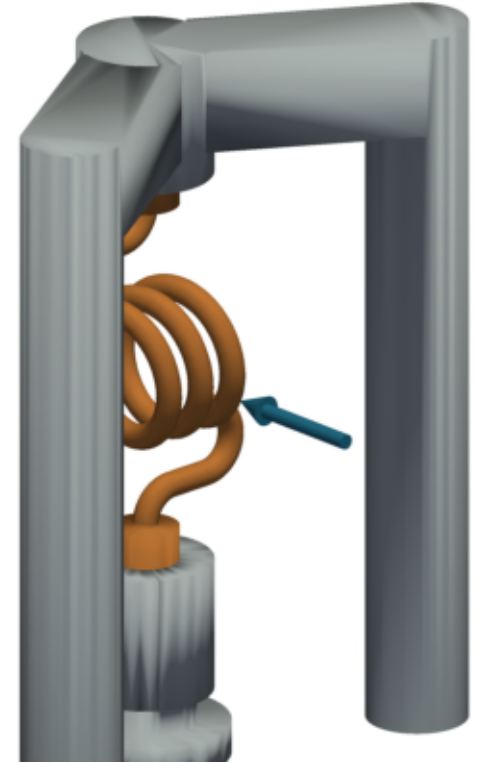

Paired versions require a new feed-through clearance hole and mount/spacer changes. Nominal CAD checks pass; mechanical and insulation qualification remain open.